

# Inner Harbor Connectivity





# Roundabout Options



Option A - linear salvaged seawall blocks with planting



Option B - curved salvaged seawall blocks with lawn/grasses




Option C - ornamental tree bosque



Option D - linear salvaged seawall blocks with planting (no trees)





Option E - formal planting with central element

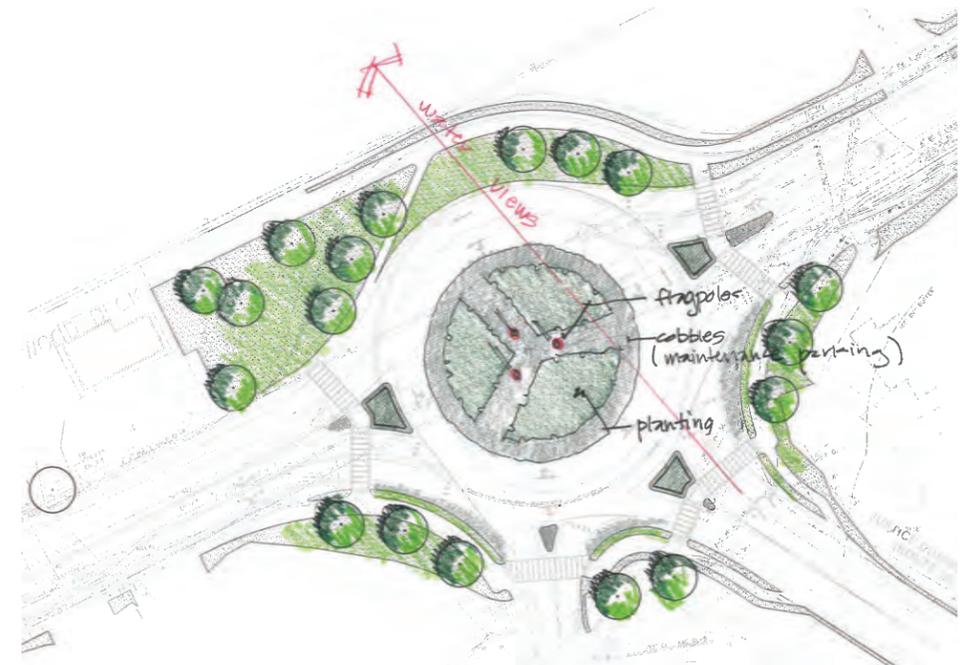

Option F - planting with flagpoles and cobbles

# Roundabout Option A

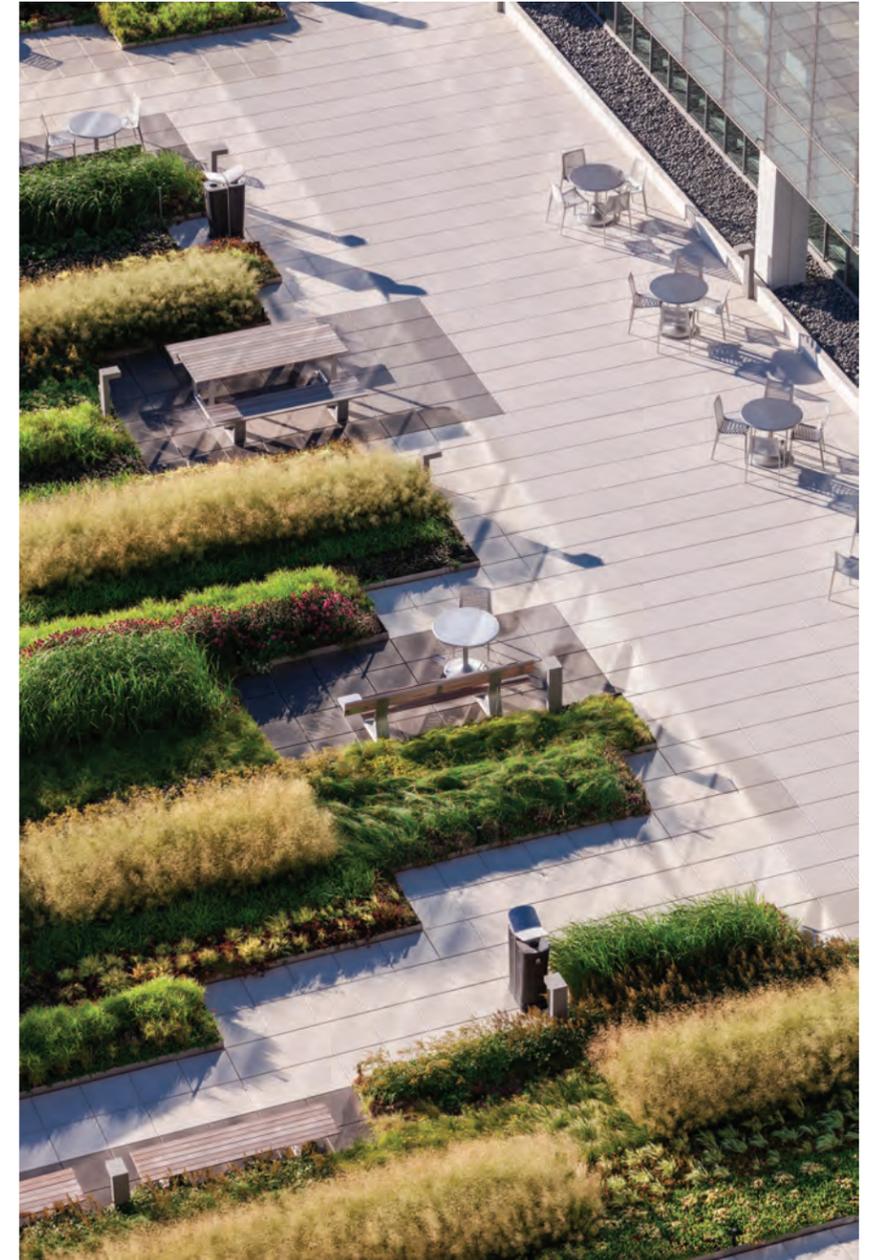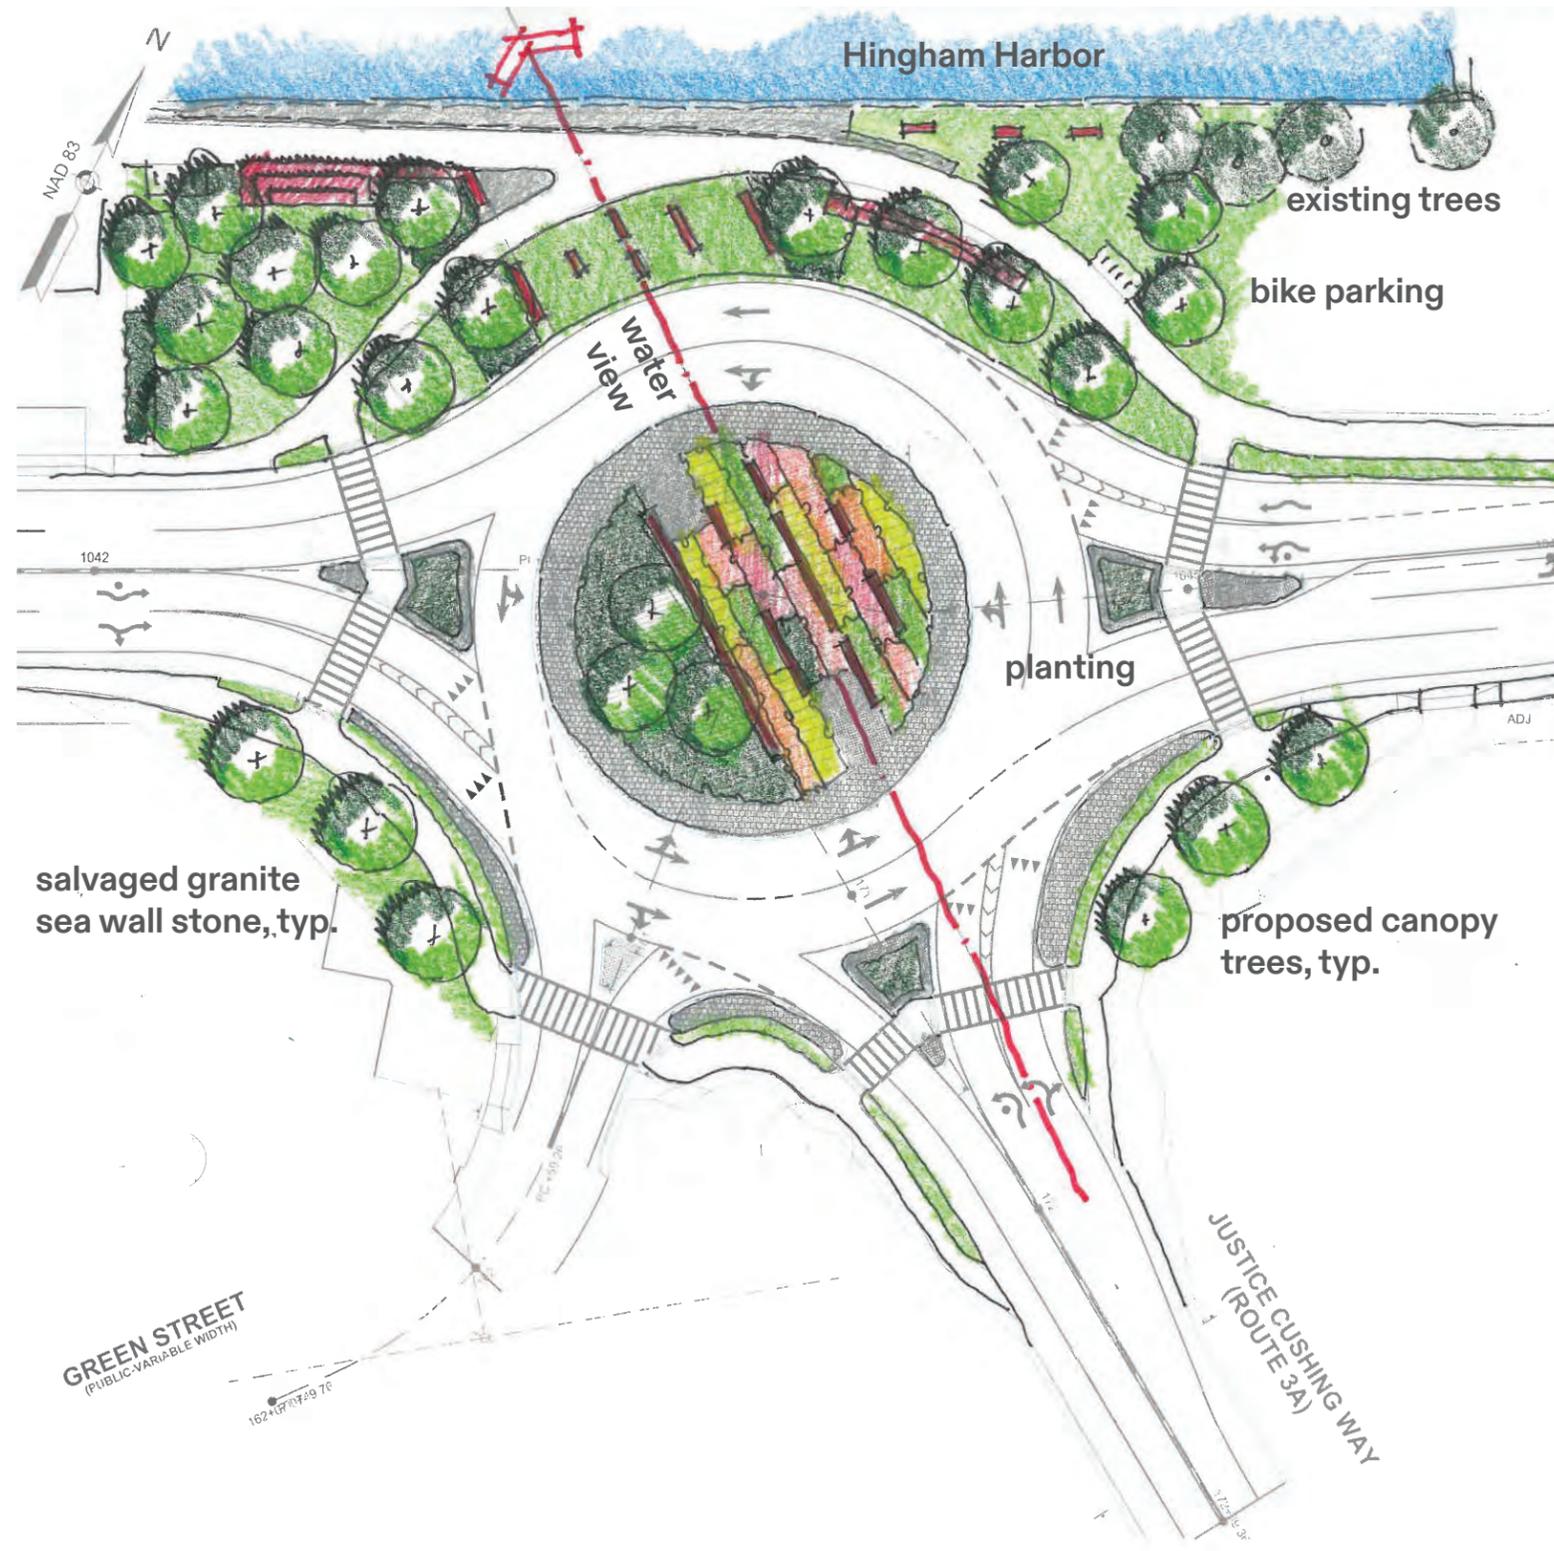



# Roundabout Option A



## Hingham Route 3A Improvements

HINGHAM AND MASSDOT | 21 FEBRUARY 2024

# Roundabout Option B

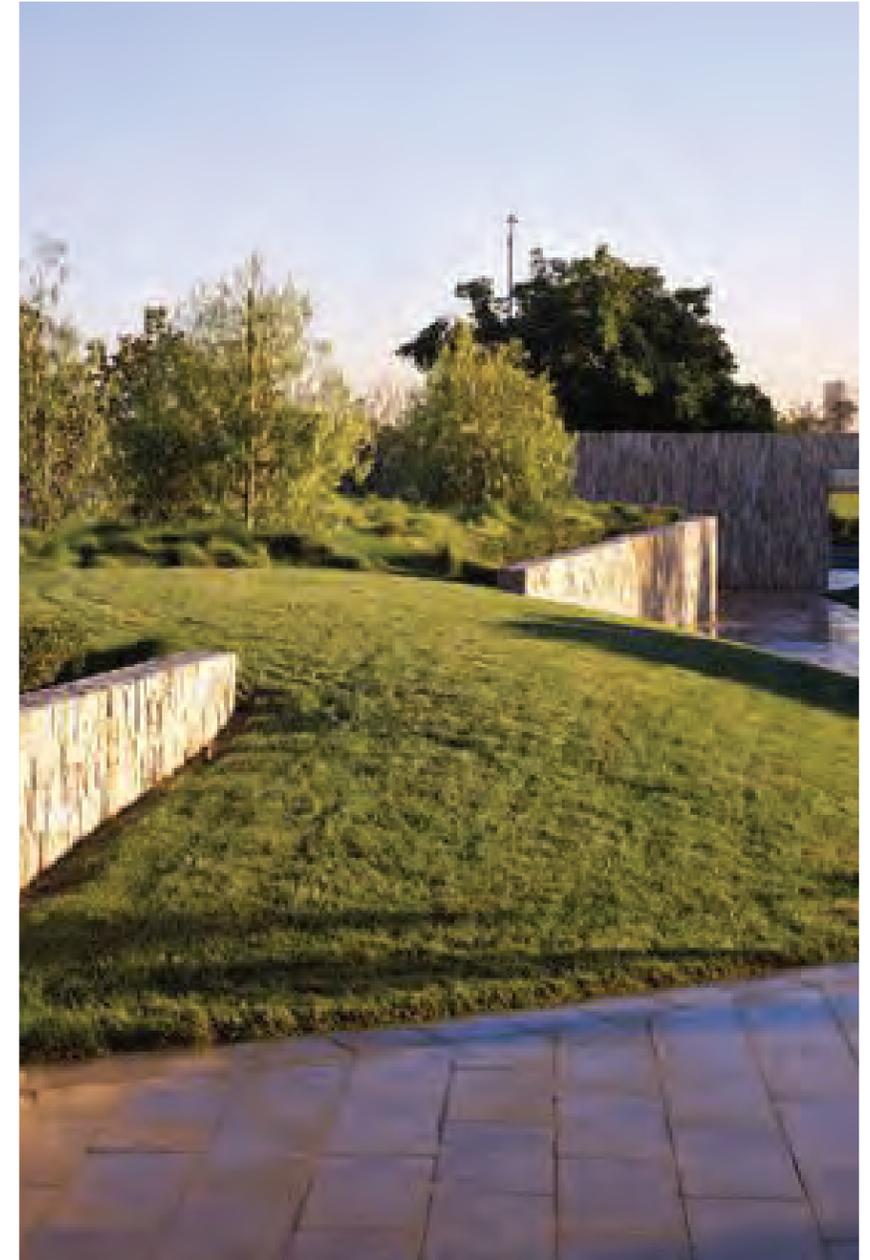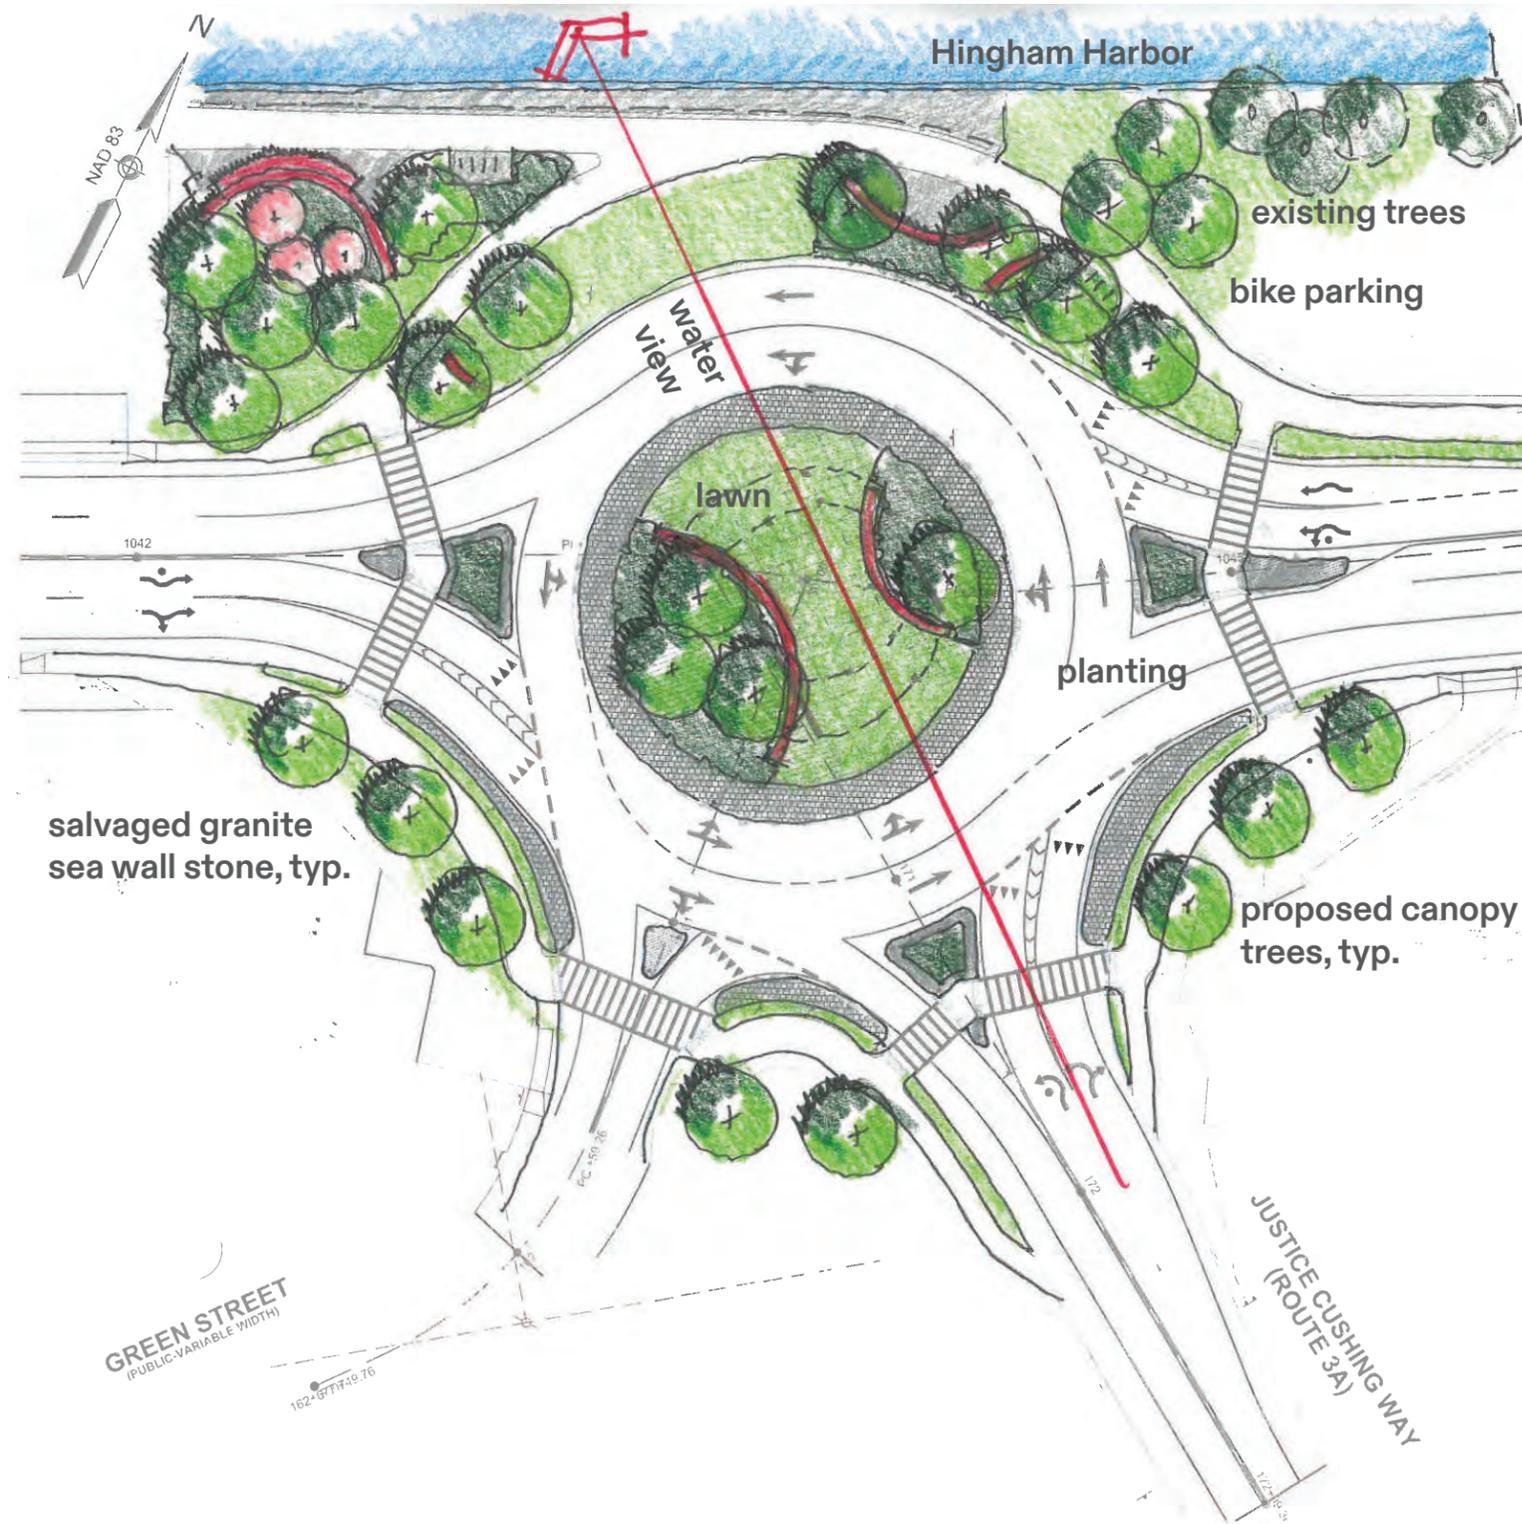


# Roundabout Option B



## Hingham Route 3A Improvements

HINGHAM AND MASSDOT | 21 FEBRUARY 2024


# Intersection Paving

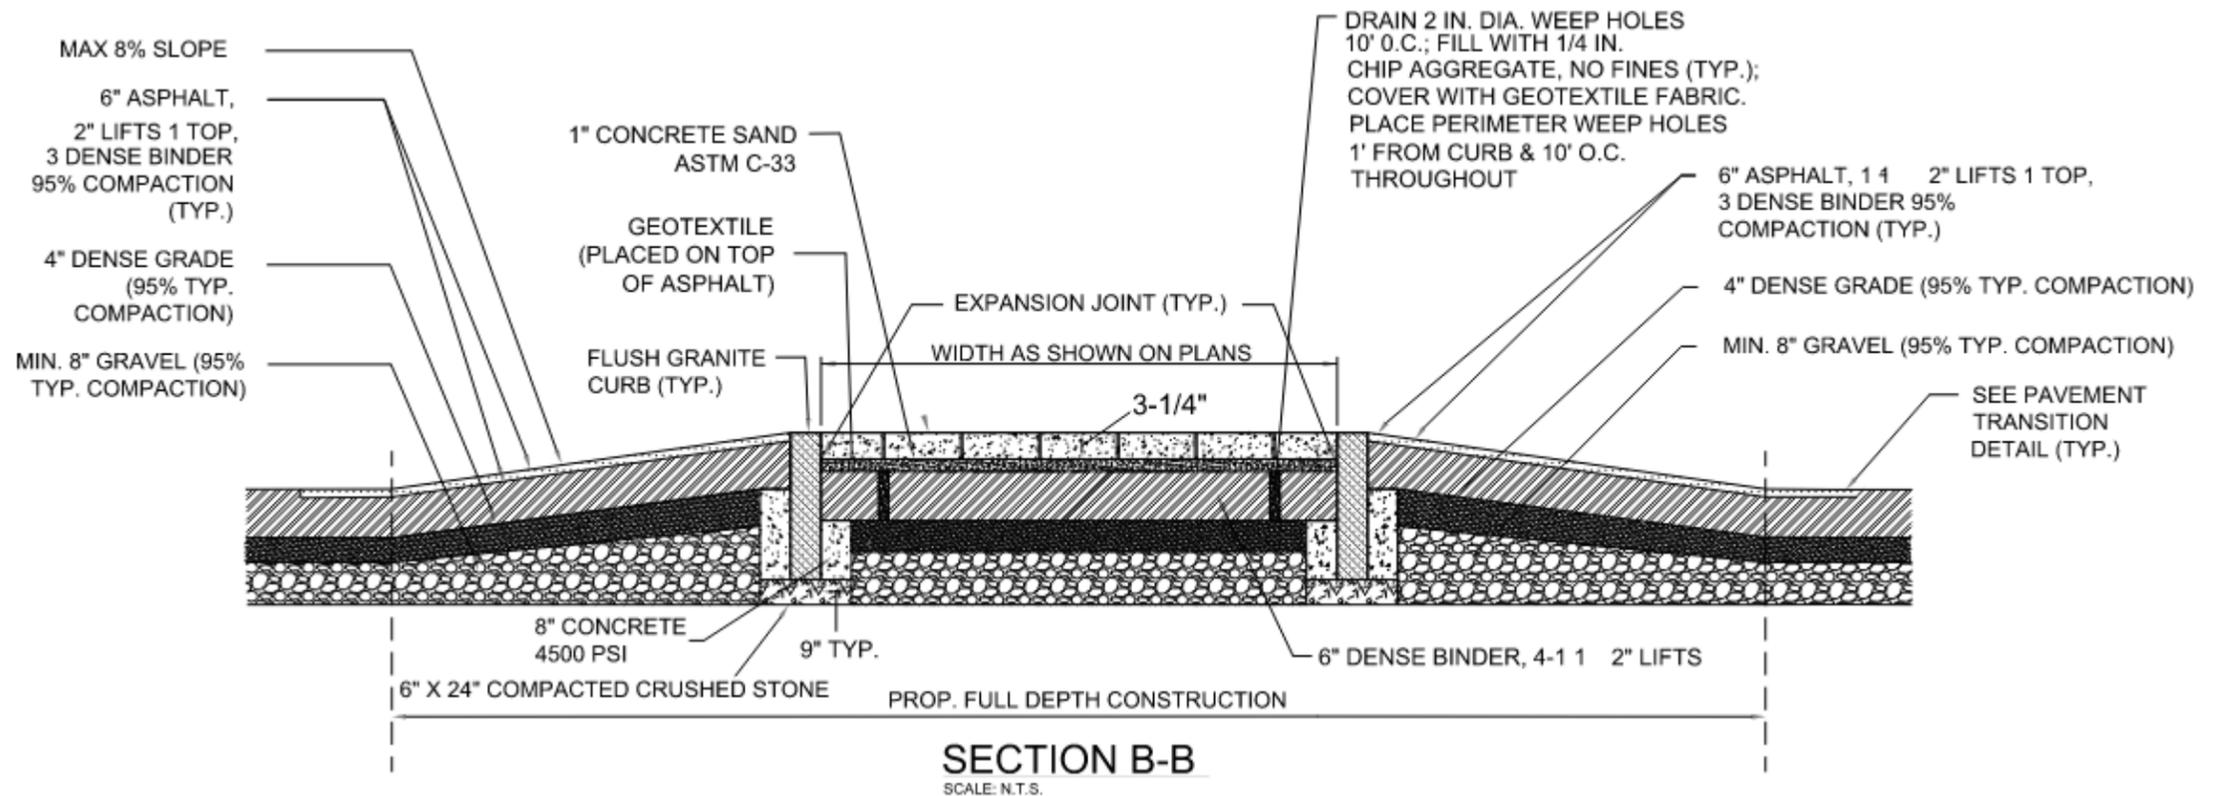

## Hingham Route 3A Improvements

HINGHAM AND MASSDOT | 13 MARCH 2024


# Lighting Extents

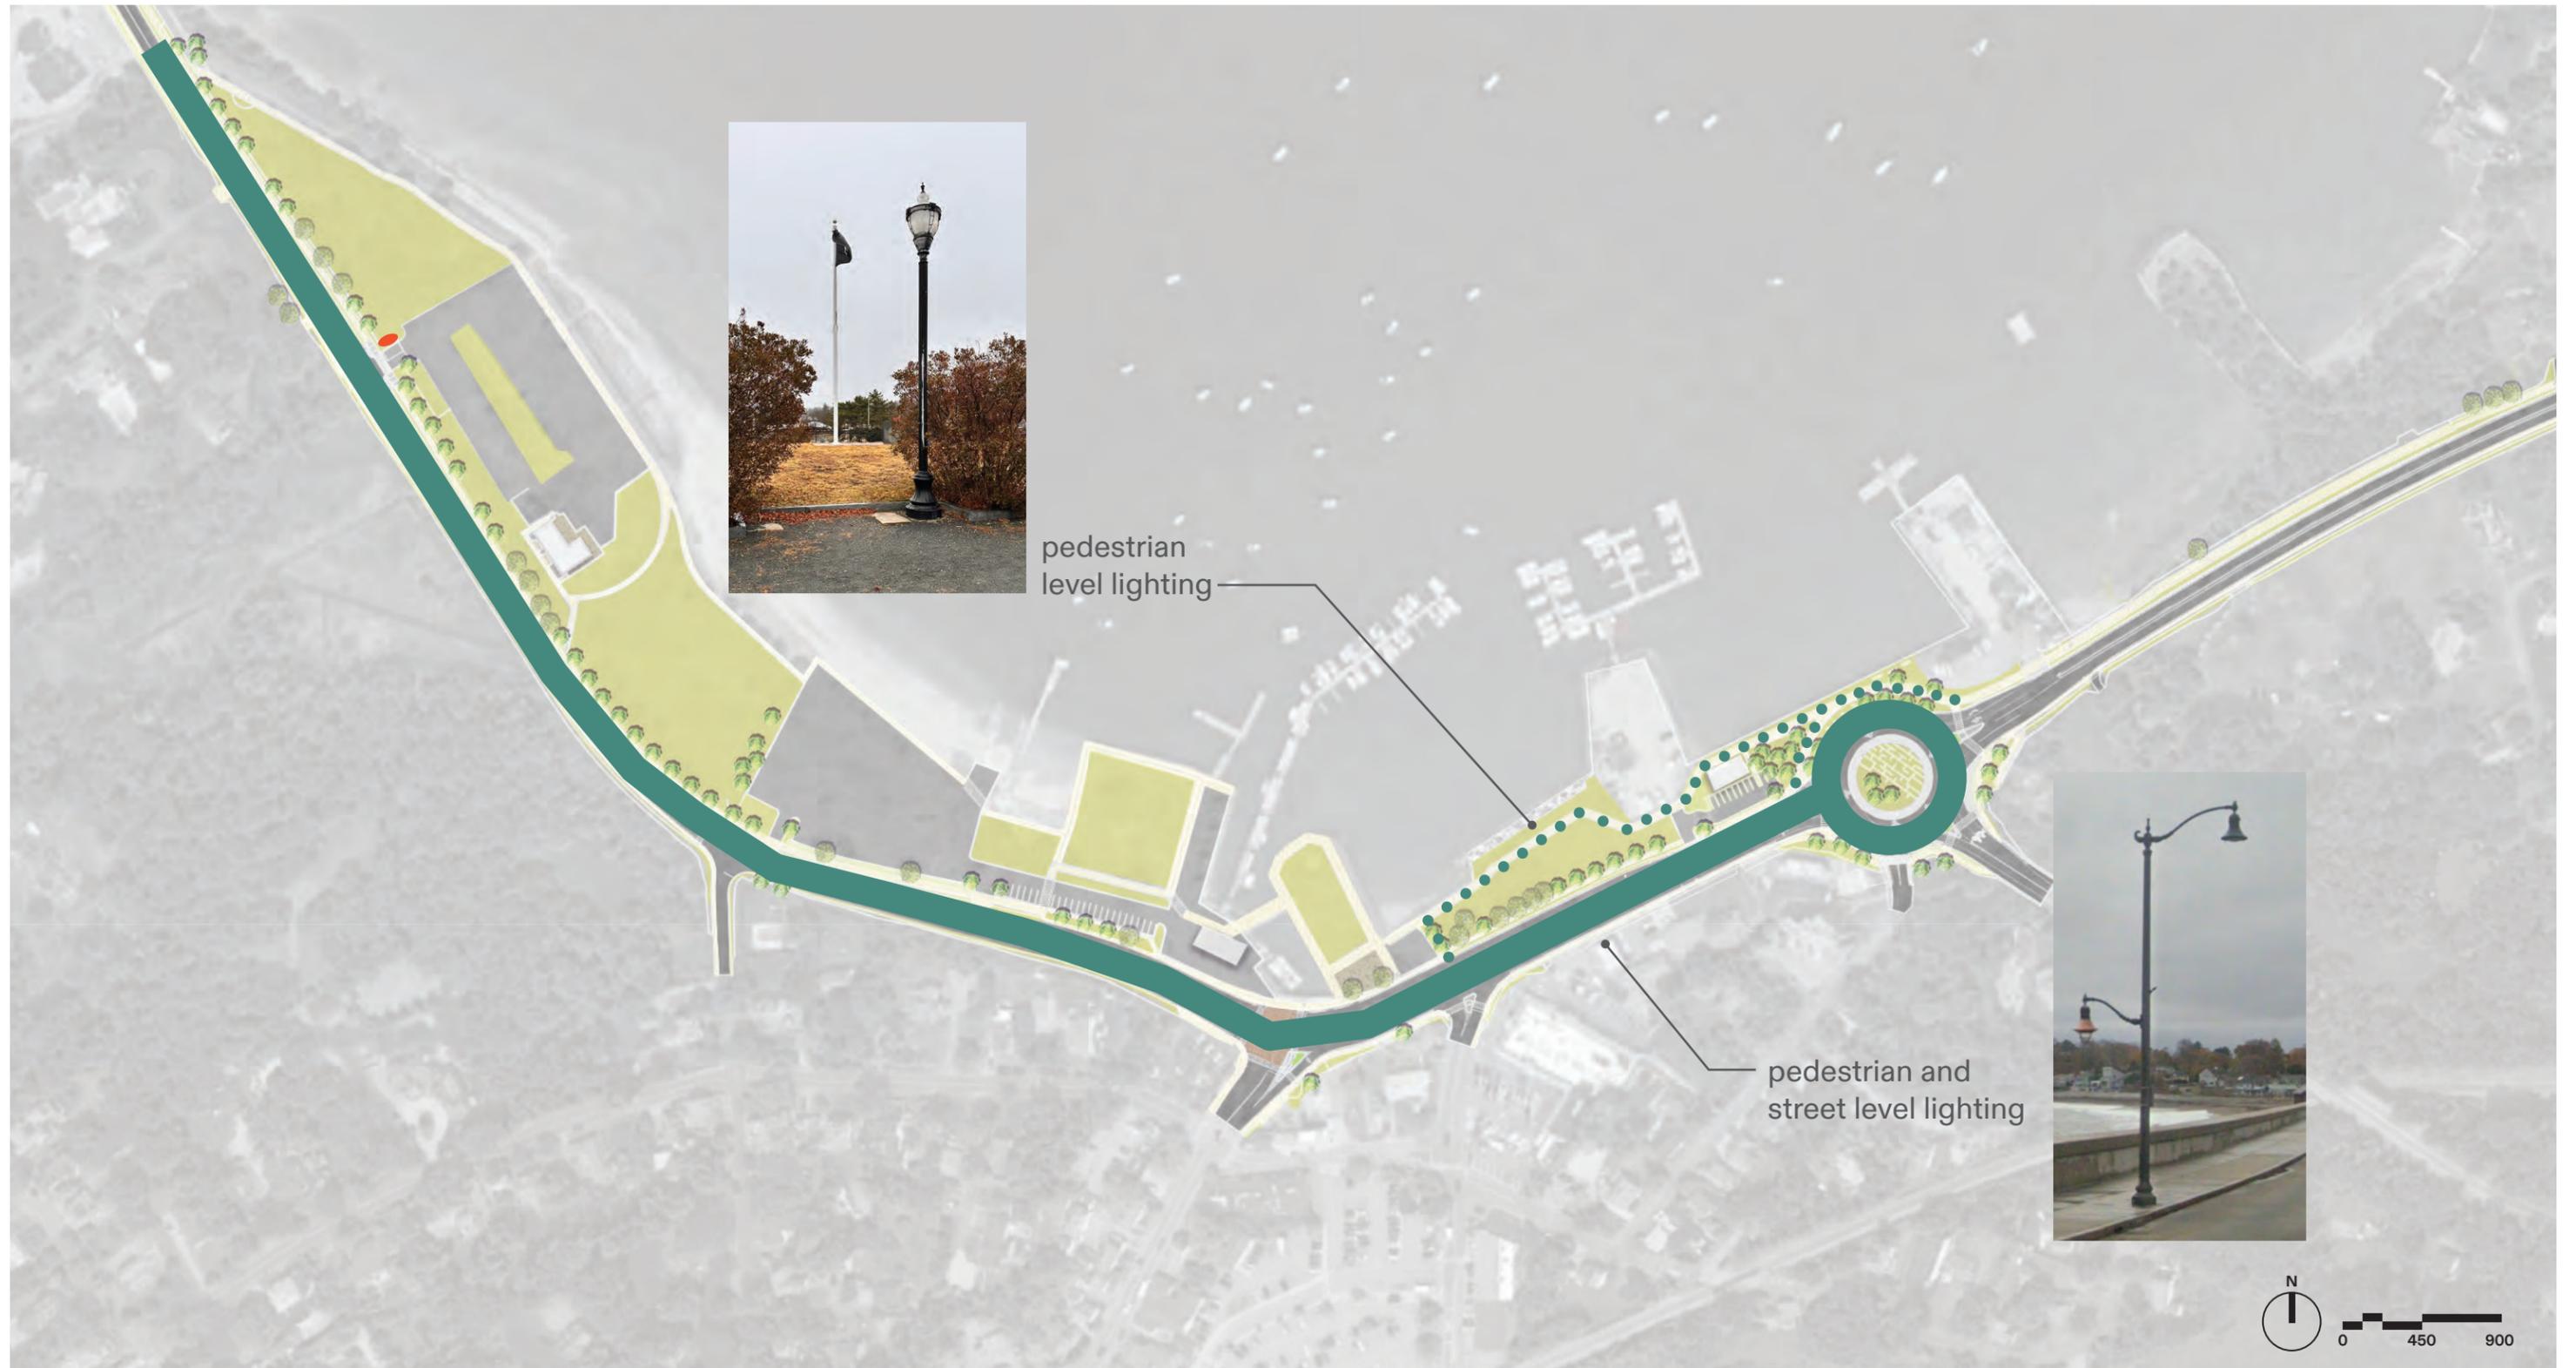

## Hingham Route 3A Improvements

HINGHAM AND MASSDOT | 13 MARCH 2024

# Lighting Styles - Post Style

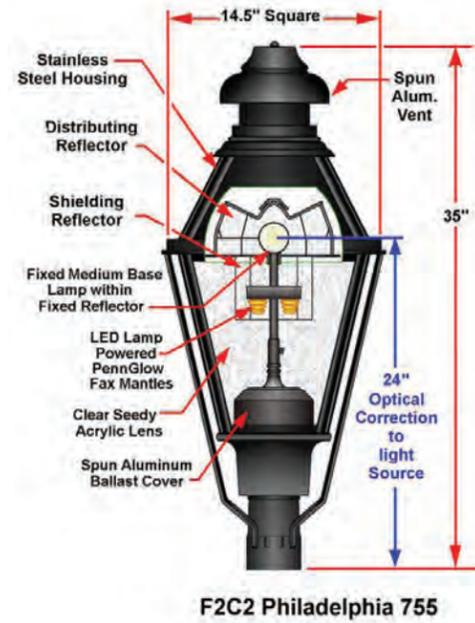

## Amherst Style Decorative Pole

### LAMP POST SPECIFICATIONS

PROJECT: NORTH ST STREETScape – HINGHAM, MA

MFR: ALLOY CASTINGS CO. INC.

MODEL: AMHERST POST WITH OPTIONAL "SLIP-OVER" BASE PLINTH

CAT#: ACDP-A-9'2"-BP-(1)15A/WP-#1003X-LT-BLACK

MATERIAL: HEAVY WALL 356 CAST ALUMINUM ALLOY

BASE DIAMETER: 8 1/4" SQUARE (LESS BASE PLINTH)

BASE PLINTH DIAMETER: 10 1/2" SQUARE.


BOLT CIRCLE: 7.5"

ANCHOR BOLT SIZE: 3/4" DIAMETER – CUSTOM ADAPTER PLATE REQUIRED TO ACCOMODATE FOUNDATION SET 4.5"-5.5" BELOW FINISHED SIDEWALK. EXISTING BOLT CIRCLE IS 17" WITH 1" DIAMETER ANCHOR BOLTS AND 3" PROJECTION.


TENON SIZE: 2 7/8" DIAMETER x 3" TALL

ACCESS DOOR: IN BASE SECTION- 4 1/2" WIDE X 8 1/2" HIGH

POLE FINISH: TO MATCH PENN GLOBE #1003X- LT - BLACK"

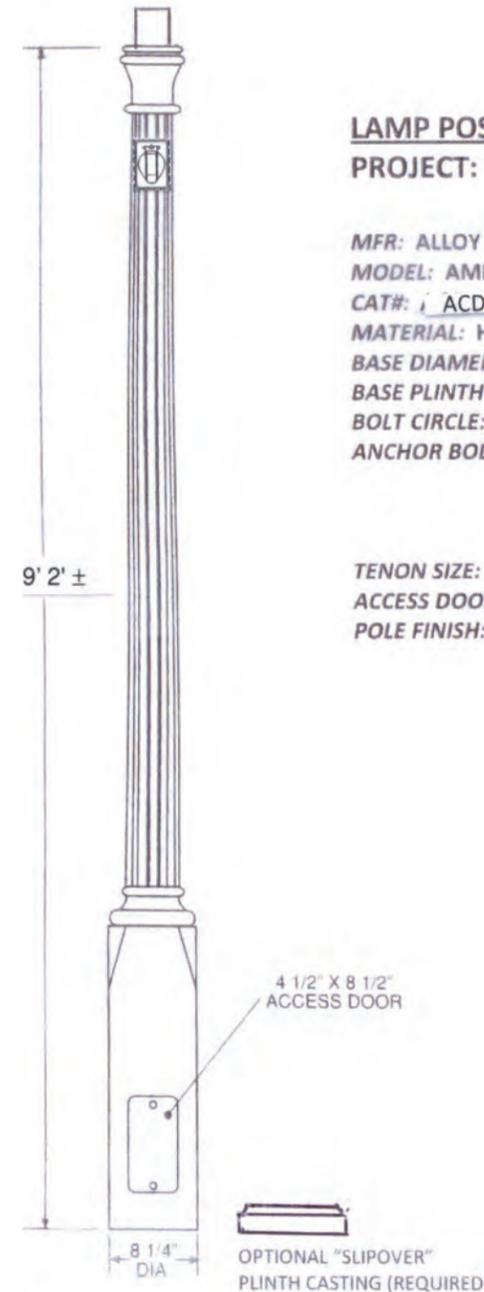

### ANCHOR BOLT DETAIL

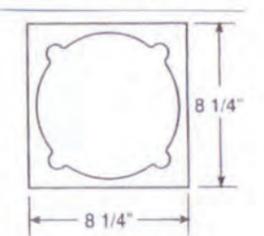

(4) 3/4" ANCHOR BOLTS ON 7 1/2" ± BOLT CIRCLE




## Hingham Route 3A Improvements

HINGHAM AND MASSDOT | 13 MARCH 2024

# Salvaged Sea Wall Stones/Seating



# Paving

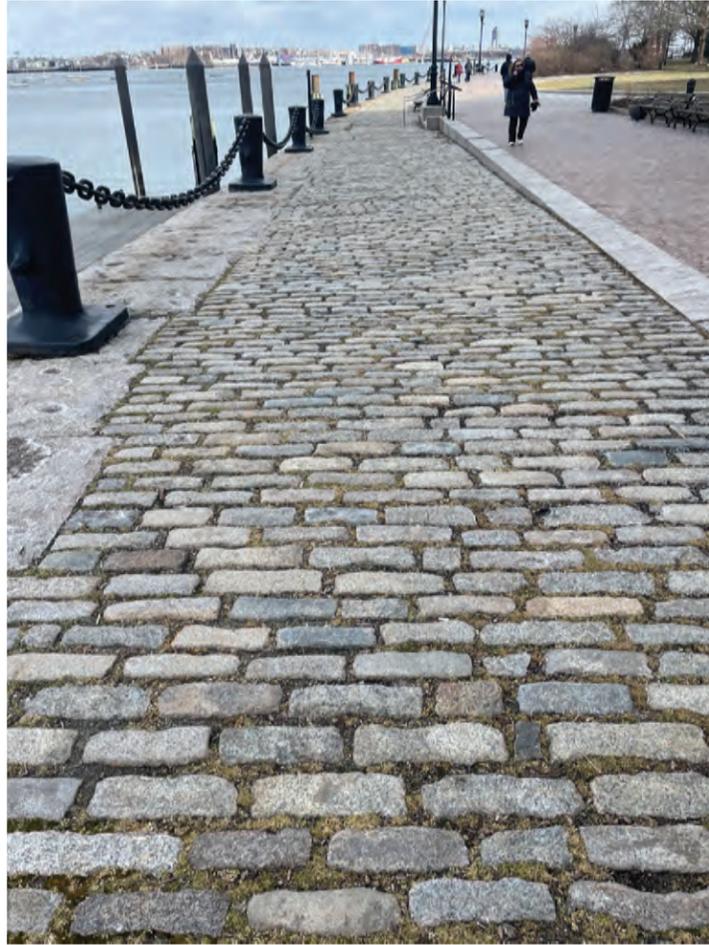

granite cobbles (no-walk surfaces)



asphalt multi-use path



flexipave (at existing tree root zones)




concrete sidewalks with sawn joints



stabilized stone dust (natural areas and park pathways)

# Planting

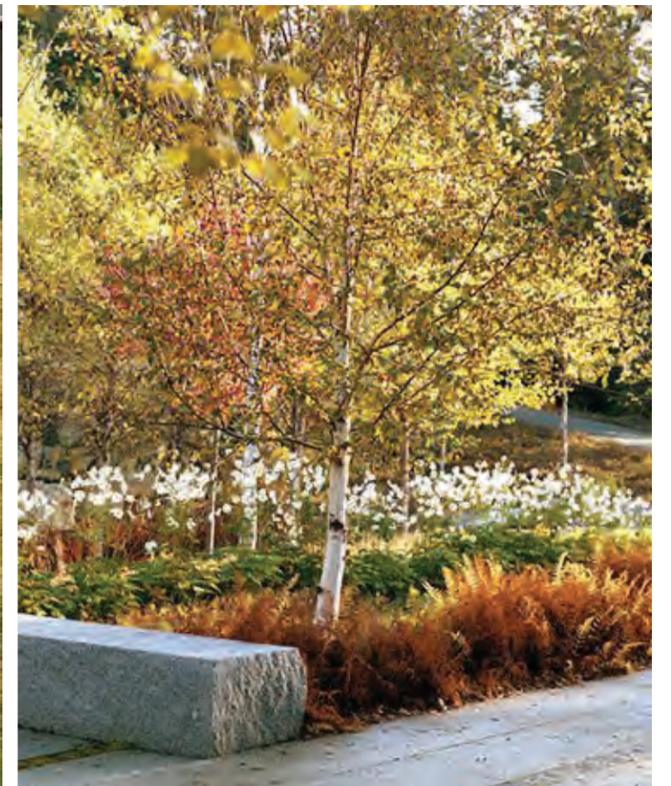

## Hingham Route 3A Improvements

HINGHAM AND MASSDOT | 13 MARCH 2024

# Interpretive Elements



## Hingham Route 3A Improvements

HINGHAM AND MASSDOT | 13 MARCH 2024